



The Castell MBV modular ball valve interlock is designed to enable locking off, in either the open, closed or both open and closed conditions. The MBV is suitable for any quarter-turn valves including Ball, Plug and Butterfly Valves up to 3" bore size. Fitting the MBV enforces a logical, predetermined and safe sequence of operation where the control of flow paths is critical. The MBV is manufactured in stainless steel with stainless steel lock portions.

OPERATION

The Castell MBV modular ball valve interlocks are used to prevent unauthorised opening (or closing) ensuring that the valve is always locked in the crucial position.


MBV modular ball valve interlock, **locked closed only condition**

- 1** Valve is normally locked closed, key is free



The service line is normally closed and the MBV modular ball valve interlock locks the valve in the closed condition. The key is free.

- 2** Insert and turn key to unlock the valve

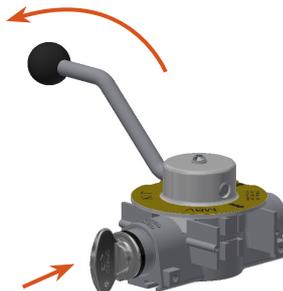

By inserting and turning the key in the MBV, you can release the valve from being locked closed to open the line.

- 3** Valve is unlocked and opened, key is trapped




The key stays trapped while the valve can be opened.

OPERATION

The Castell MBV modular ball valve interlocks with locked open and locked closed condition are used to prevent unauthorised closing of one of lines (e. g. operational line) ensuring that one line is always open (e. g. service line).

MBV modular ball valve interlock, locked open and closed condition

- 1** Valve is locked open, key B is trapped, key A is released.

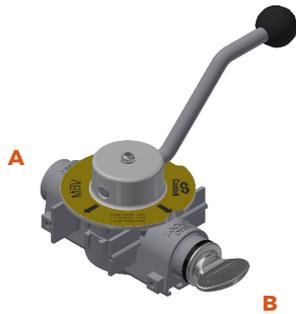

The service line is normally open and the MBV modular ball valve interlock locks the valve in the open position. Key A is free, while key B is trapped.

- 2** Insert and turn key A to unlock the valve. Turn the valve to closed position. Turn and release key B to lock the valve in the new position.



By inserting and turning key A in the MBV, the valve can be released from locked open condition and changed to closed. By turning and releasing the key B the valve is locked in the closed condition.

- 3** Valve is closed, key A is trapped, key B is released.



Key A stays trapped and key B is released while the valve locked closed.

USAGE

The MBV Modular ball valve interlock should be used to prevent unauthorised closing or opening of of lines.

 The MBV modular ball valve Interlock is not designed for large bore valves above 3 inches.

No hazardous substances were used in the manufacture of this product.

INSTALLATION

Fitting the MBV enforces a logical, predetermined and safe sequence of operation where the control of flow paths is critical.

The MBV interlocks are available in either the locked open, locked closed or both locked open and locked closed conditions.

 **IMPORTANT:** Please supply the valves to Castell to enable the MBV to be fitted.

 The MBV Modular Ball Valve Interlock must be installed by a competent and qualified person who has read and understood these instructions. Please retain this document in your technical file.

 The manufacturer should be consulted when use in a corrosive environment is planned.

MAINTENANCE

Periodic visual checks should be carried out by the site manager/safety officer.

Do not lubricate lock barrel with oil or grease, use CK Dry Powder Graphite if necessary.

 In case of defects being detected please contact your nearest Castell Support Department for further actions. Please see Contact section for contact details.

 The interlock must be inspected every 6 months. Safety checks should include ensuring the keys can only be removed in the correct safety operating conditions (see page 1).

TECHNICAL DATA


Temperature rating	Minimum: -40°C [-40°F] ice free for Q & FS lock type
	Maximum: 107°C [224.6°F] for Q lock type/140°C [284°F] for FS lock type or 288°C [550°F] upon request
Type of mounting	The MBV modular ball valve interlocks must be fitted to the valves by a competent engineer
Weight	4.0 kg
Material	Stainless steel body with stainless steel lock portions
B10d	2,000,000
Shock & vibration	EN 60068
PL rating	PLe

APPLICATION

The MBV safety interlock is designed to operate as part of an integrated safety system controlling the operation of quarter turn ball valves in safety critical applications. The typical application of the MBV modular ball valve interlock is preventing unauthorised closing of one of the lines ensuring that one line is always open.

Interlock valves in both open and closed positions have an inter-changeable key between the valves ensuring that the first valve is open before the second is closed. While the operational line is locked open, the service line is locked closed. Prior to opening the service line it needs to be ensured the operational line is locked closed. By inserting key A (from control room) in the MBV, which controls the operational line, you can unlock the valve and bring it from open to closed. By turning and releasing key B, you can lock the valve in the closed condition.

Key B can be taken to the next valve, which controls the service line. This valve can now be unlocked by inserting and turning key B in the MBV. The valve position can then be changed from closed to open and locked in the open position by releasing key C. This key can then be taken to the control room.

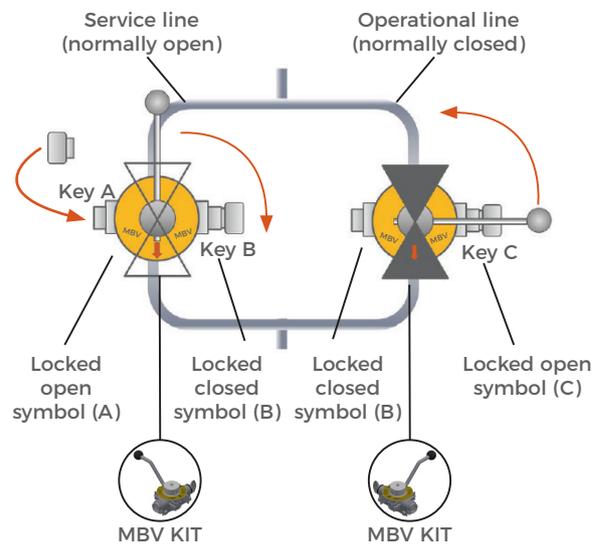

EC-DECLARATION

We, the manufacturers, declare that the components detailed herein and placed on the market comply with all the essential health and safety requirements applying to them.

ISO 13849-1:2015 Safety of Machinery

2006/42/EC Machinery Directive

Empowered signatory:


Kirstie Van Oerle
Business Unit Director 

DRAWING


Dimensions: in mm

Note: For safe mounting, use security screws

MBV, open position

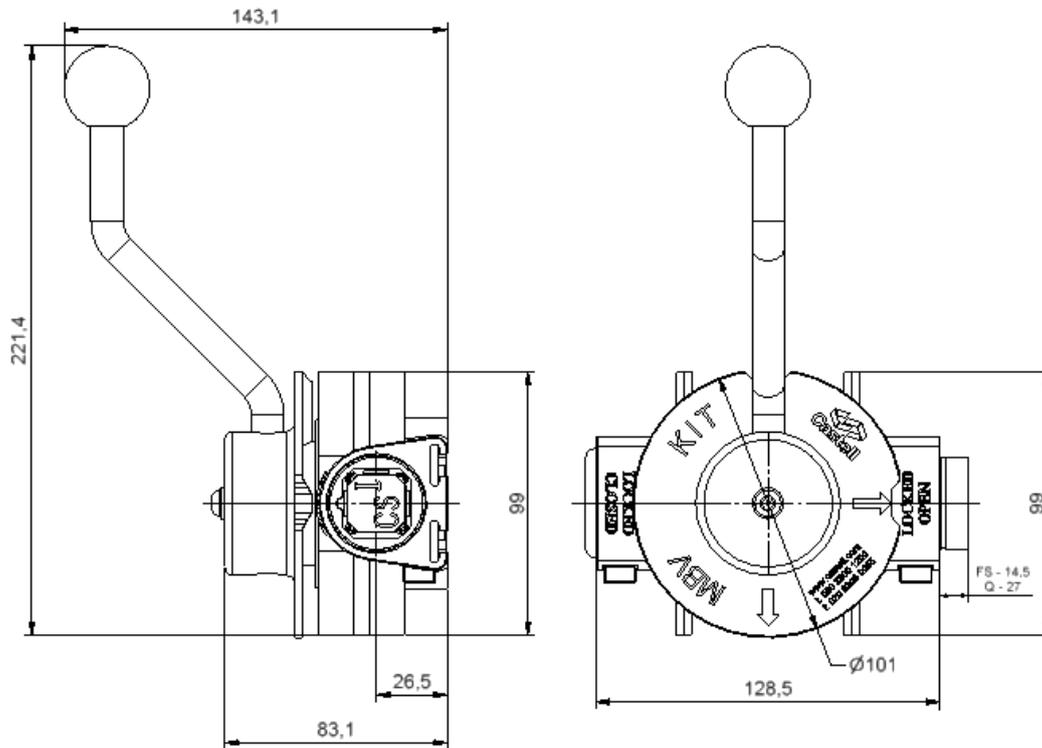

MBV, closed position

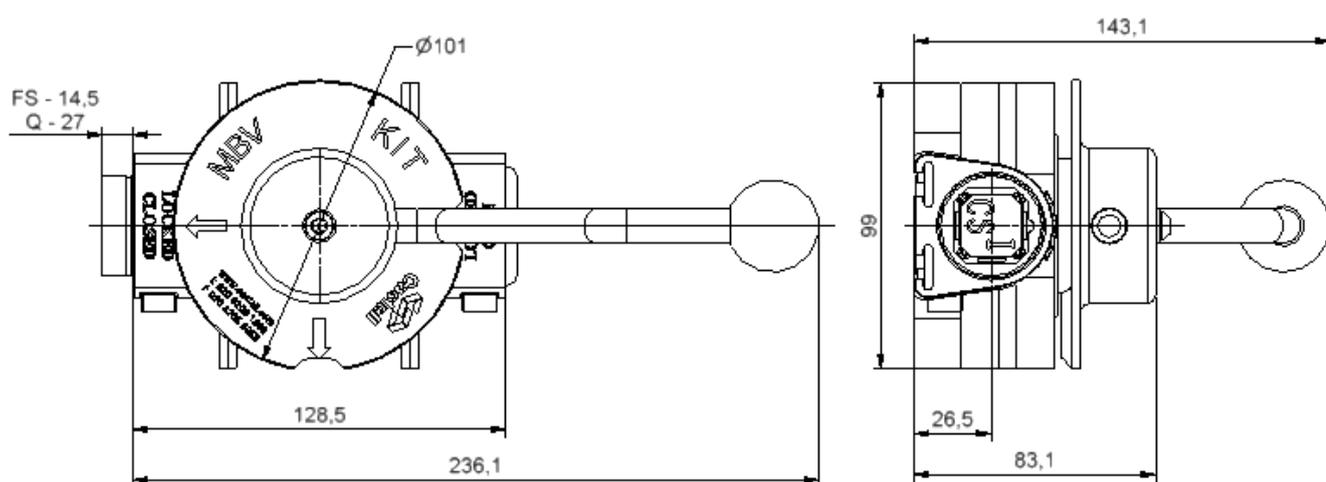

ORDER INFORMATION

	Component type	1	2	3	4*
Part number	MBV				
Example	MBV	FS	S	L/O - L/C	
5	A	L/O Symbol			
	OR				
	B	L/C Symbol			

1	Lock portion type	FS ⁽¹⁾ / Q ⁽¹⁾
2	Material	S = Stainless steel (standard)
3	Valve locked state	L/O = locked open L/C = locked closed L/O-L/C = locked open and closed
4*	Optional: additional features available	SWITCH = complete with LIMIT SWITCH EEXDSW = complete with ATEX LIMIT SWITCH
5	Lock portion symbols	L/O Symbol = locked open symbol (please advise) L/C Symbol = locked closed symbol (please advise) FS ⁽¹⁾ up to 3 characters / Q ⁽¹⁾ up to 6 characters

(1)	FS - Lock type Up to 3 characters	Q - Lock type Up to 6 characters
		

Special construction available upon enquiry

ACCESSORIES

	Product	Part number
	Flip Cap	FLIP-S

APPENDIX - PRICING APPLICATION FORM QUESTIONNAIRE


Customer organisation name	Delivery address
Customer organisation contact person	
Customer organisation contact number and email address	

Valve details	
(1) Type of host valve/s (please circle one) Ball Valve <input type="checkbox"/> Butterfly <input type="checkbox"/>	(9) Pressure handling capacity (alternatively, please provide a data sheet of valve in selection)
(2) Valve model, manufacturers and part number	(10) Operating temperature
(3) Is it 2 or 3 way valve? (please circle one) 2-way <input type="checkbox"/> 3-way <input type="checkbox"/>	(11) Weight of the valve
(4) Degree of rotation (please circle one) 90 Degrees <input type="checkbox"/> 180 Degrees <input type="checkbox"/>	(12) Is the interlocked valve a sequence or one-off? Sequence <input type="checkbox"/> One-off <input type="checkbox"/>
(5) Size of valve in DN or inches	(13) Operating cycle of the valve (please circle) Daily <input type="checkbox"/> Monthly <input type="checkbox"/> Yearly <input type="checkbox"/> Other <input type="checkbox"/>
(6) Operating torque	(14) Does the valve handle gases or fluids?
(7) Class of valve	(15) Is the valve exposed to hazardous operating environment? If so, please specify
(8) Gland size	

Note: All completed pricing application forms must be accompanied by a top work drawing of the entity in question. An example of the type of top work drawing required is included on page 8 of this document.

APPENDIX - TOP WORK DRAWING EXAMPLE

Note: To be provided with the Pricing Application Form

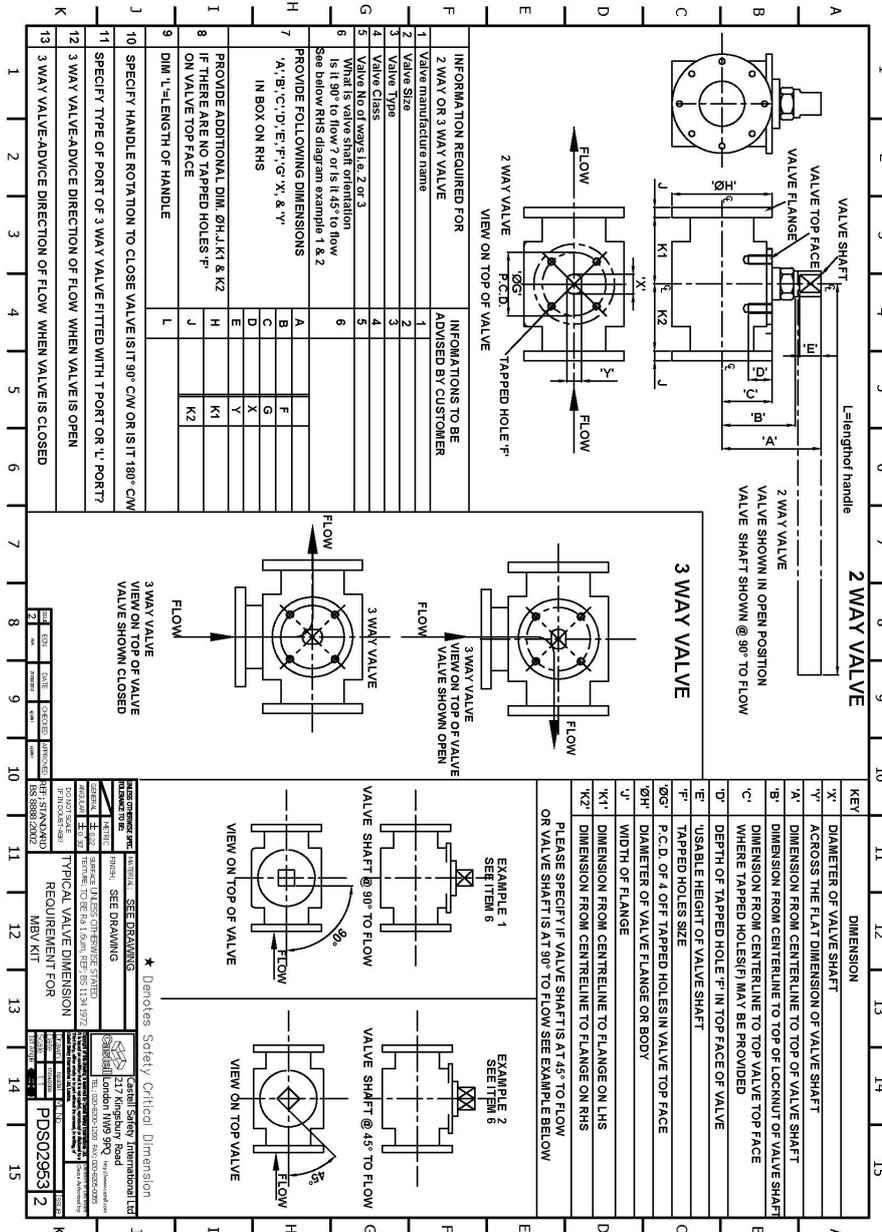

CONTACT INFORMATION

Castell Safety
 The Castell Building
 217 Kingsbury Road
 London, NW9 9PQ
 UK
 t: +44 (0)20 8200 1200
 f: +44 (0)20 8205 0055
 e: sales@castell.com

Castell Safety
 Tower 185
 60185 Frankfurt am Main
 Germany
 t: +49 (0)69 50 50 47 310
 f: +49 (0)69 50 50 47 450
 e: vertrieb@castell.com

Kirk Key Interlock
 9048 Meridian Circle NW
 North Canton, OH 47720
 USA
 t: +1 800 438 2442
 f: +1 330 497 4400
 e: sales@kirkkey.com

SPS China
 2F, Building 63
 No 421 Hongcao Road, Xuhui District
 Shanghai PRC, 200233
 China
 t: +86 (0)21 6040 7398
 f: +86 (0)21 5453 0630
 e: chinasales@castell.com